

300-5286

600REY

FEATURES:

- » Industrial 2 HP Motor, Totally Enclosed, Fan Cooled
- » 3 Cylinder CAT® Super Flow Plunger Pump
- » Master Control with 24V Control Circuits
- » Manifold Hose
- » Thermal Limit Switch 120° F / 49° C
- » Chemicals are injected by Two Solenoids
- » Anti-Siphon and Backflow Protection/ Float Tank
- » Water Level Float Switch Assembly
- » Pressure gauge, 2000 psi / 138 Bars, Liquid Filled
- » 6 ft. / 1.8 m Water Inlet Supply Hose
- » Maintenance Kit: Water Filter, Replacement Filter, and One Hydraulic Oil (ISO-68)
- » ETL-CSA Listed to UL 1776
- » Shipping Weight: **164 lbs./ 75 kg.**



**Pictured with optional mounting rack*

300-5286 600REY:

2.2 gpm / 8.3 lpm @ 1000 psi / 69 Bars, 208V
2.2 gpm / 8.3 lpm @ 1100 psi / 76 Bars, 230V
2.9 gpm / 11 lpm @ 775 psi / 53 Bars, 208V
2.9 gpm / 11 lpm @ 850 psi / 59 Bars, 230V


(800) 548-3373

www.spraymastertech.com

A brand line of
Assembled Products Corporation

115 E Linden • Rogers, Arkansas 72756 USA | Office: (479) 636-5776 • Fax: (479) 636-3245



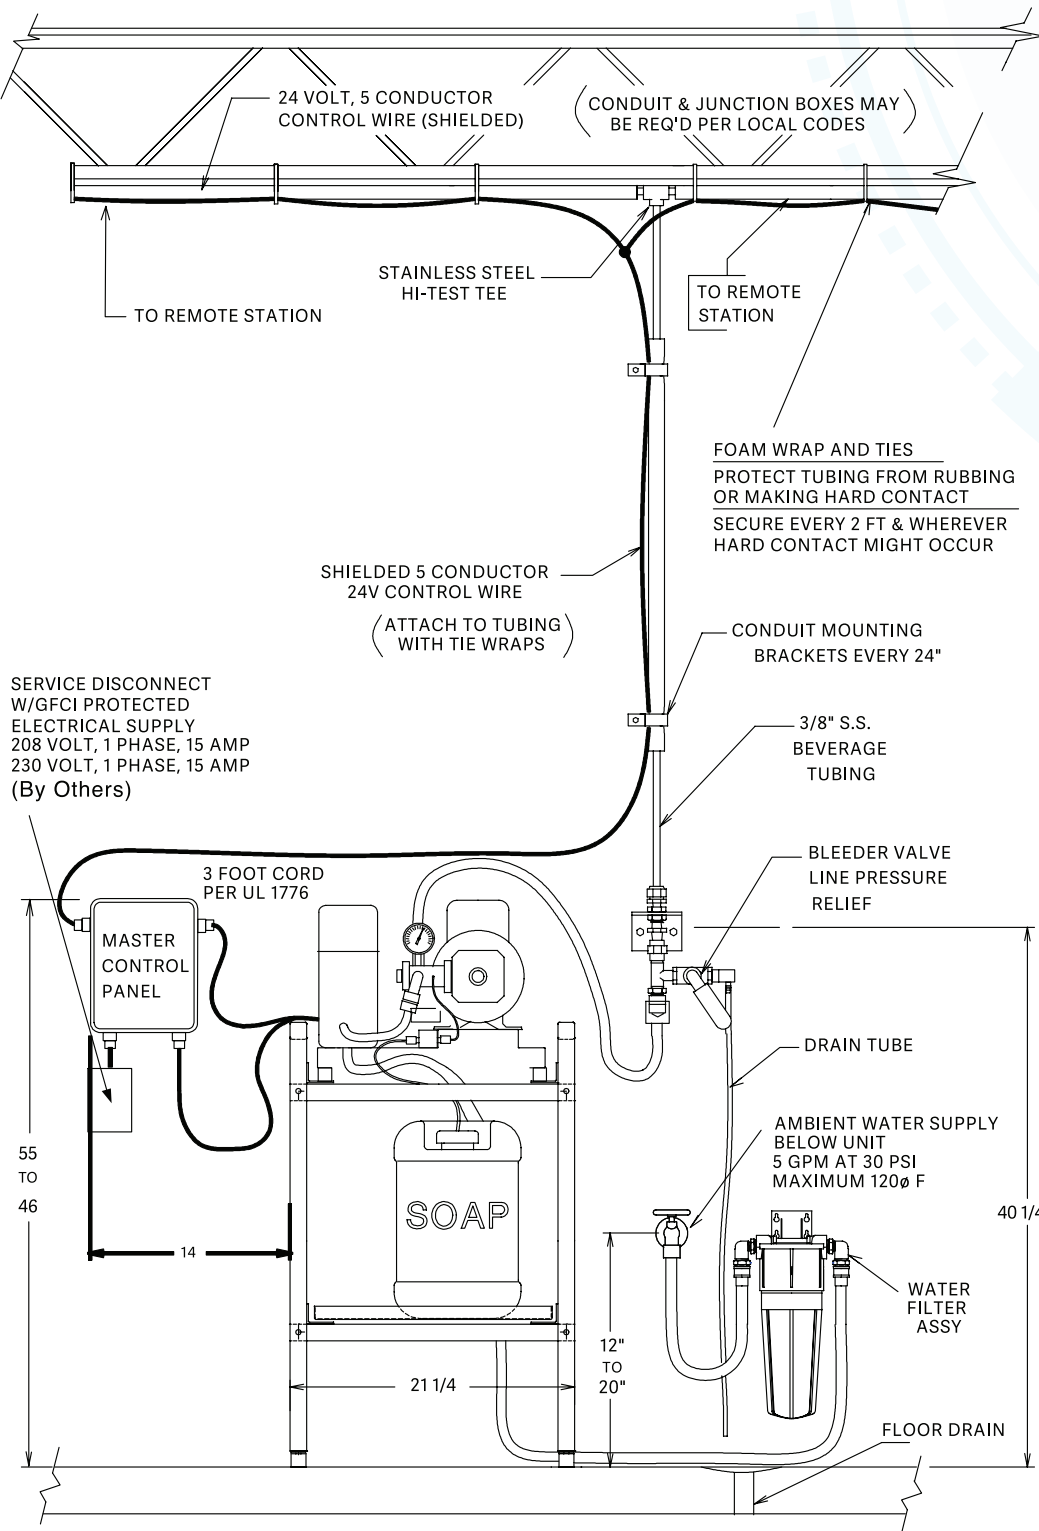

EQUIPMENT SPECS:

CLEARANCES

- » Left Side 12"/ 30cm
- » Right Side 12"/ 30cm
- » Overhead 14"/ 35cm
- » Floor 36"/ 91cm
- » Front 36"/ 91cm

PLUMBING

3/4"/2cm Hose Bib with
5gpm/.14Lpm @ 30psi/ 20.6bars.
120°F/49°C

ELECTRICAL

208-230V, 9A GFCI

INSTALLATION SPECS:

ELECTRICAL

208V - 230V 20A hard wired through service disconnect at pump. **CAUTION:** In all installations the use of a Ground Fault Interrupter (GFI) in the power supply circuit is essential for personal safety.

WATER

One (1) water outlet 120°F/ 49°C MAX with standard 3/4"/ 1.9cm hose bib with shut-off valve. A pressure gauge in the water line can be helpful although it is not mandatory. A minimum of 5 gal./ 19L per minute and a line pressure not less than 30psi/20.6bars, is required.


LOCATION

Heated utility room or closet with ventilation. Minimum 14in/.35m clearance above unit required to remove cover. The cover must be removed for servicing the unit. The unit can be serviced without removing it from the wall.

GENERAL RECOMMENDATIONS

Floor drains are essential in new facilities to receive the greatest utilization and maximum efficiency of your **Spray Master** pressure washer. Floor Materials and wall coverings which can be cleaned with pressurized water are desirable. Locate electrical outlets above washing areas.

600/2000 REY TUBING & WIRING

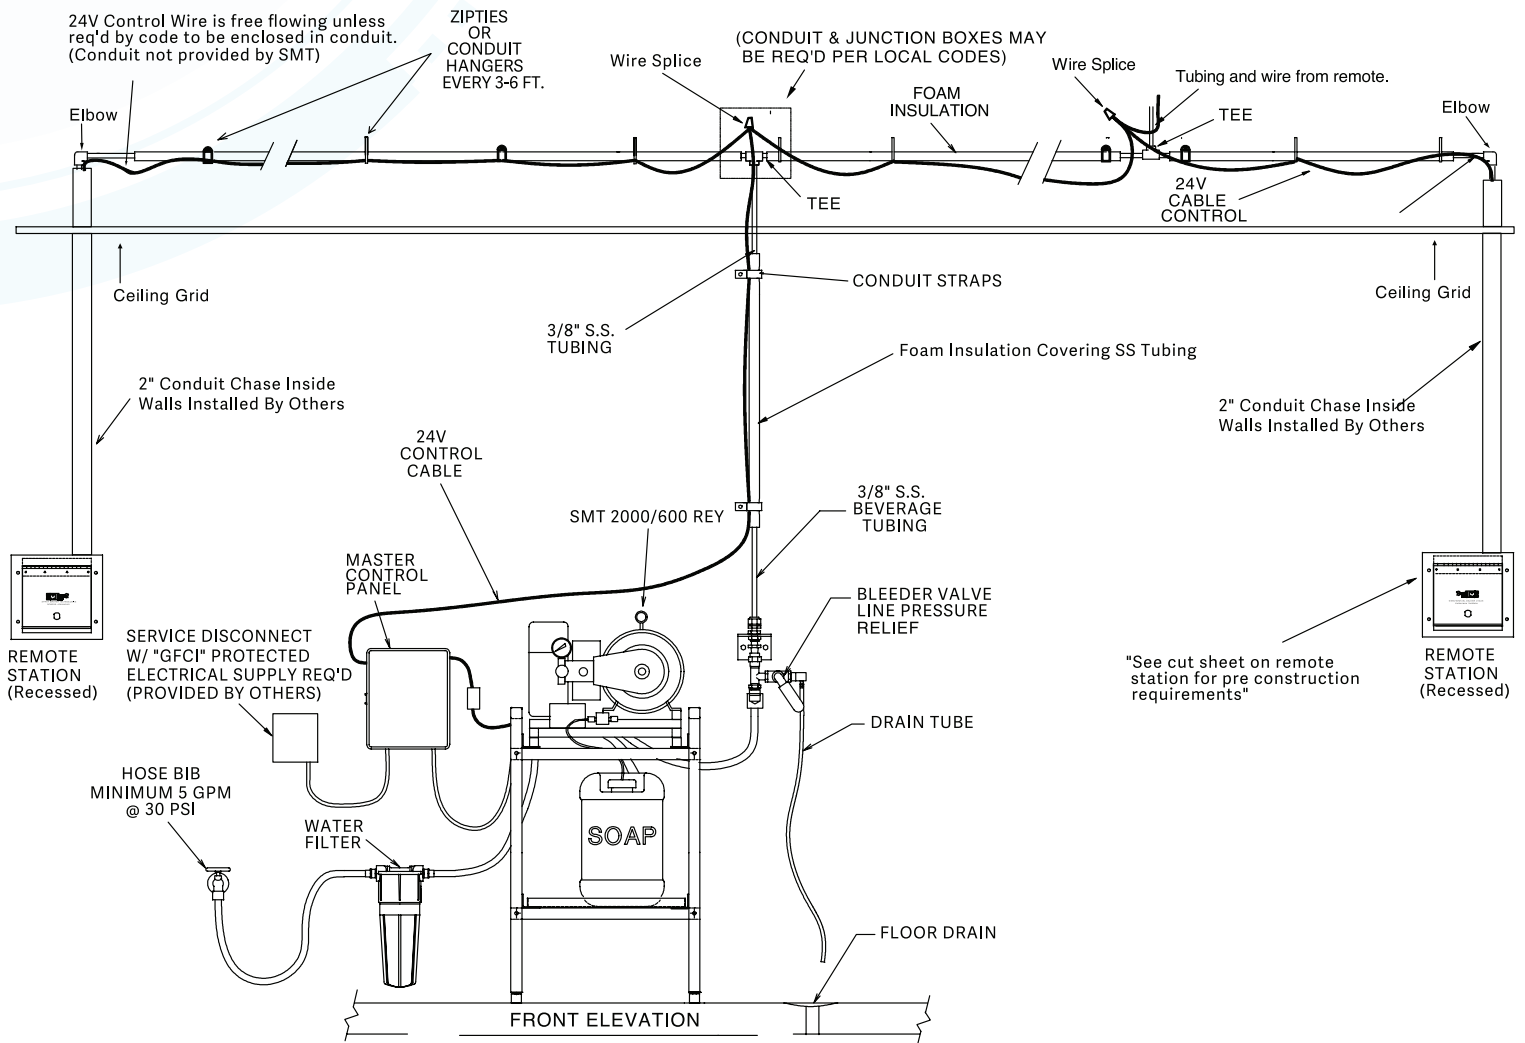

NOTES:

NOTE: Electrical, Water, and Backing are not supplied by Spray Master.

1. SMT will not provide any chase work in the wall or above the suspended ceiling for stainless steel tubing or 24V control wire.
2. All unions and tees must be accessible for servicing and to check for leaks. Do not make connections in areas that will become inaccessible after construction is complete.
3. The foam insulation over tubing should be installed as the stainless steel tubing is being installed. This can be done by shipping foam tubes over the end of the stainless tubing and sliding it into place over the entire length of the run.
4. Low voltage control cable is run along with and typically strapped to the hi-pressure tubing running to each remote station. This 24 Volt wiring does not require enclosure in conduit. Check local code for verification.



www.spraymastertech.com